


High Frequency Microwave Amplifier

Frequency Range: 2-10 GHz

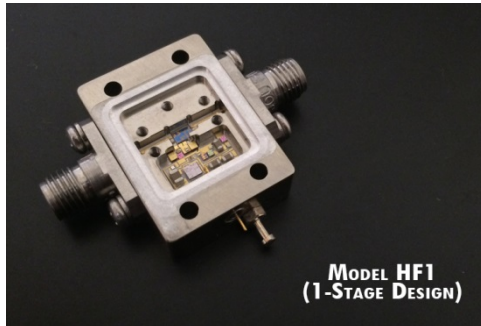

Features

- High Frequency and Broad Bandwidth: 2-10 GHz
- Low Noise Figure: 1.5 dB Typical
- Laser Welded Housing for Ultimate Environmental Protection
- EAR99

Model BXHF1081 is a high frequency amplifier covering 2-10 GHz. This design utilizes a laser sealed housing for superior environmental protection. This standard design may also be ordered in a screened MIL-STD-883 version (Model #SXHF1081.) All specification ratings are based on measurements in a 50 Ω (ohm) system with a DC supply voltage tolerance of +/- 2%.

Technical Specifications

Parameter	Unit	Typical	Min/Max
Frequency Range	GHz	2-10	2-10
Gain	dB	16	14
Noise Figure	dB	1.5	2.5
Output Power @ 1 dB Compression	dBm	17	16
Output 3 rd Order Intercept	dBm	23	-
Output 2 nd Order Intercept	dBm	31	-
Reverse Isolation	dB	35	-
Input VSWR	---	1.5:1	2.0:1
Output VSWR	---	1.5:1	2.0:1
Supply Voltage	volts	+12	+12
Supply Current	mA	65	85

Maximum Ratings







Maximum (No Damage) Ratings	
Storage Temperature	-55°C to +85°C
Operating Temperature	-40°C to +85°C
DC Voltage @ 25°C	+15 volts
Input Drive @ 25°C (CW)	+13 dBm

* Typical values are measured at 25°C, but not guaranteed.

Mechanical & Electrical

Parameter	Specification
Specification Temperatures (Min/Max)	-20°C to +70°C
Housing Size	0.870" L x 1.060" W x 0.300" H
Housing Drawing	HF1 Package
RF Connectors	SMA Female Replaceable Connectors

Technical Performance

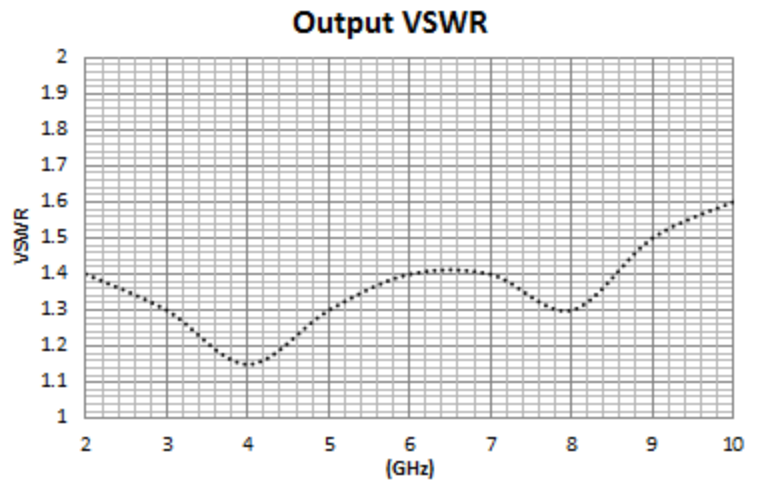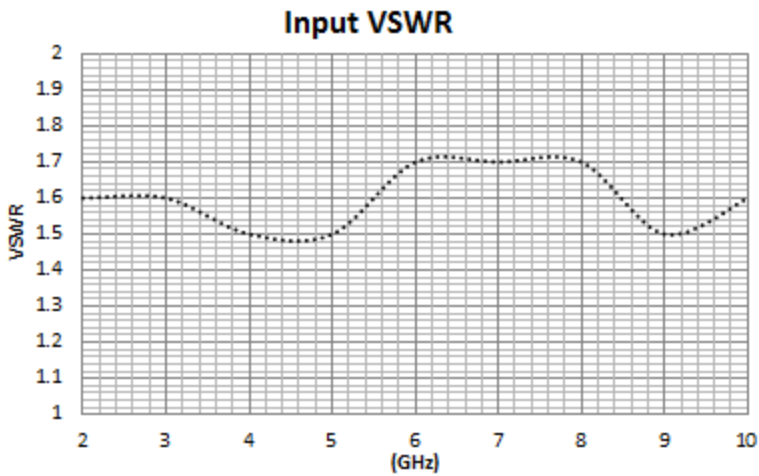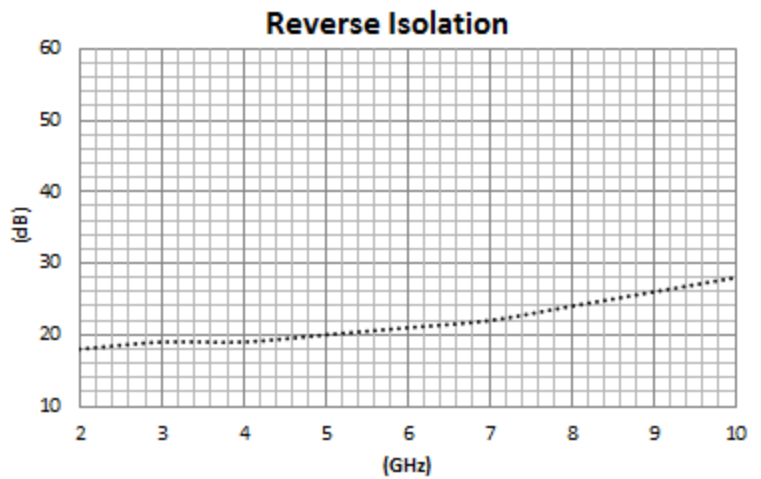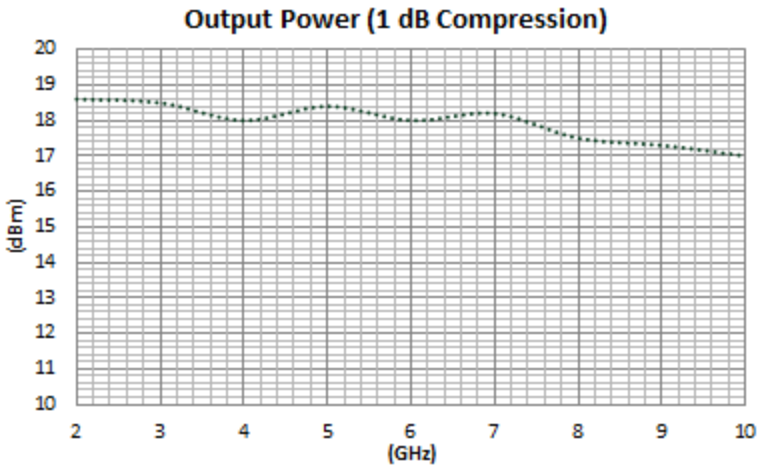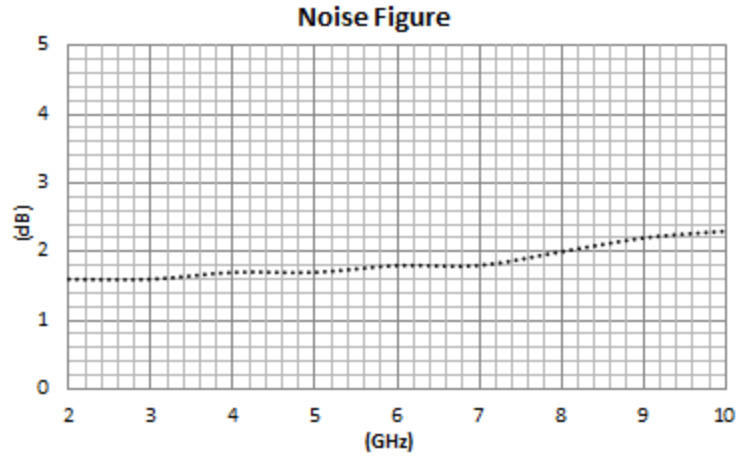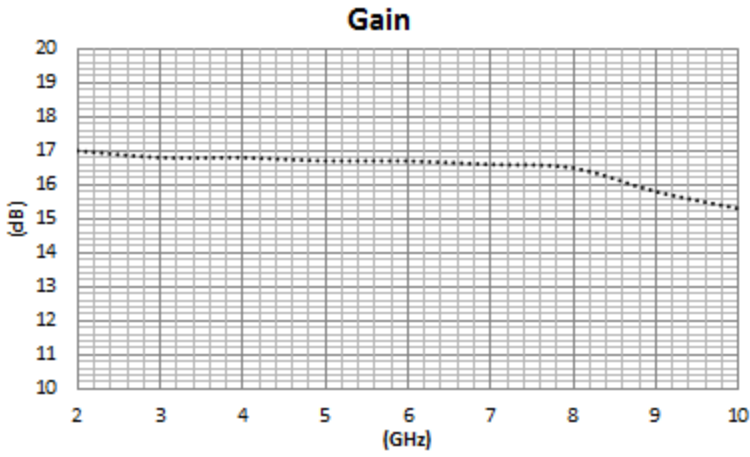

Instructions

Grounding Instructions	Care should be taken to effectively ground each unit.
Revisions	API reserves the right to make revisions to both product and/or the information contained within their datasheets without advanced notice.
Min./Max. Values	Specifications are guaranteed when tested in a 50 Ω (ohm) system.
Typical performance graphs and values are measured at 25°C, but not guaranteed.	

Outline Drawing

(For Reference Only)

NOTES:

1. MATERIAL: ALUMINUM NICKEL PLATED

