

# RF AMPLIFIER

## MODEL QBH-2830



### Features

- High Gain: 34.5 dB Typical
- High Power: +30 dBm Typical
- Replaces Discontinued Modular Amplifiers

### Specifications


CHARACTERISTIC	TYPICAL <i>T</i> <sub>a</sub> = 25 °C	MIN/MAX <i>T</i> <sub>a</sub> = ±25 °C
Frequency	5 - 200 MHz	5 - 200 MHz
Gain (dB)( <i>f</i> = 100 MHz)	34.5	34.5 Min/ 35.5 Max.
Gain vs. Temperature	—	—
Gain Flatness	± 0.5	± 1.0 Max.
Reverse Isolation (dB)	—	—
VSWR	In Out	1.5:1 2.0:1 Max.
1 dB Compression (dBm)	+30	+28 Min.
3rd Order Intercept (dBm)	+46	+44 Min.
Noise Figure (dB)	4.7	5.5 Max.
Power	Vdc mA	+24 300
		+24 330 Max.

#### Notes:

1. Maximum operating temperature is defined as that temperature which, if exceeded for extended periods, could result in premature unit failure. This data is provided for user reliability information. This may or may not represent the maximum temperature for electrical parameter specifications.
2. Specifications are guaranteed when tested in a 50 Ohm system. Specifications indicated as typical are not guaranteed.

### Absolute Maximum Ratings

Ambient Operating Temperature ..... -20 °C to +100 °C  
 Storage Temperature ..... -40 °C to +100 °C  
 Case Temperature ..... +125 °C  
 DC Voltage ..... +28 Volts  
 Continuous RF Input Power ..... +5 dBm  
 Short Term RF Input Power .... 100 Milliwatts (1 Minute Max.)  
 Maximum Peak Power ..... 0.1 Watt (3 µsec Max.)

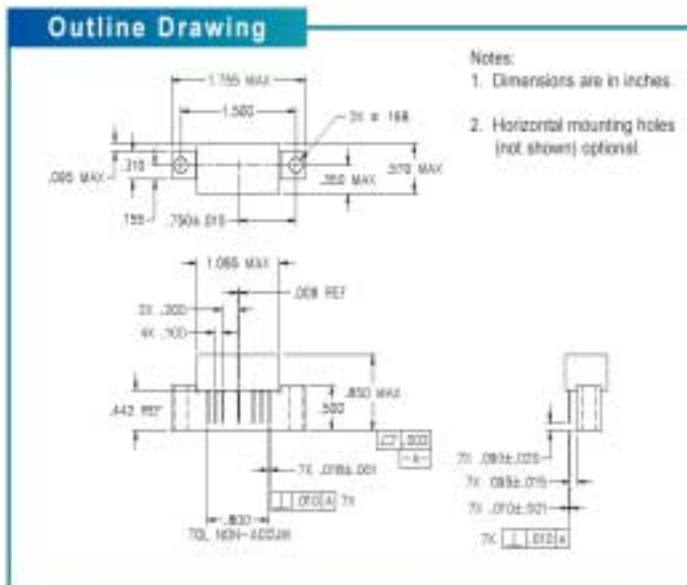

### Typical Performance Data

