

RF AMPLIFIER

MODEL *TM7205*

Available as: TM7205, 4 Pin TO-8 (T4)
 TN7205, 4 Pin Surface Mount (SM3)
 FP7205, 4 Pin Flatpack (FP4)
 BX7205, Connectorized Housing (H1)
 PN7205, Reduced Size Surface Mount (SM11)

Features

- Low Noise Figure: <2 dB Typical
- High Gain: 20 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 200 MHz	10 - 200 MHz
Gain (dB)	20	19 Min.
Power @ 1 dB Comp. (dBm)	+11.5	+10.0 Min.
Reverse Isolation (dB)	-23	-22 Max.
VSWR In	<1.8:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise Figure (dB)	<2	2.5 Max.
Power Vdc	+5	+5 Min.
mA	21	24 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +36 dBm (Typ.)
 Second Order Two Tone Intercept Point +30 dBm (Typ.)
 Third Order Two Tone Intercept Point +23 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 8 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

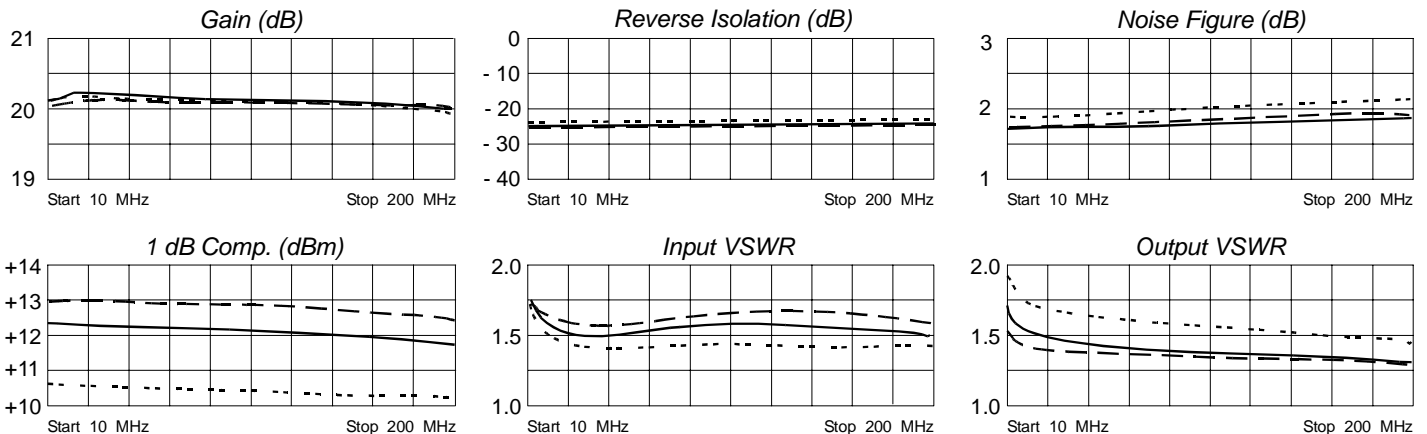

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.31	- 20	9.69	-176	.05	-177	.23	- 22
50	.30	- 33	9.78	159	.05	153	.21	- 12
100	.29	- 61	9.72	136	.05	128	.20	- 16
150	.28	- 92	9.70	113	.06	100	.20	- 28
200	.24	-130	9.62	88	.06	75	.19	- 45
250	.20	167	9.43	60	.06	47	.15	- 77
300	.26	80	8.52	29	.06	20	.10	-144

