CMN613

788 MHz Band Reject Filter

Revision 1, May 19, 2011

Passband:	**764.0 – 813.0 MHz**	
Passband:	**851.0 – 858.0 MHz**	
Insertion Loss:	**2.0 dB max.**	
Return Loss:	**15 dB min.**	
Rejection:	**40 dB min**	**816.0 – 817.0 MHz**
Rejection:	**40 dB min**	**861.0 – 862.0 MHz**
Connectors:	**Mini-UHF-Female**	
Operational Temp:	**-30°C to +60°C**	
Finish:	**Unpainted, Silver Finish**	

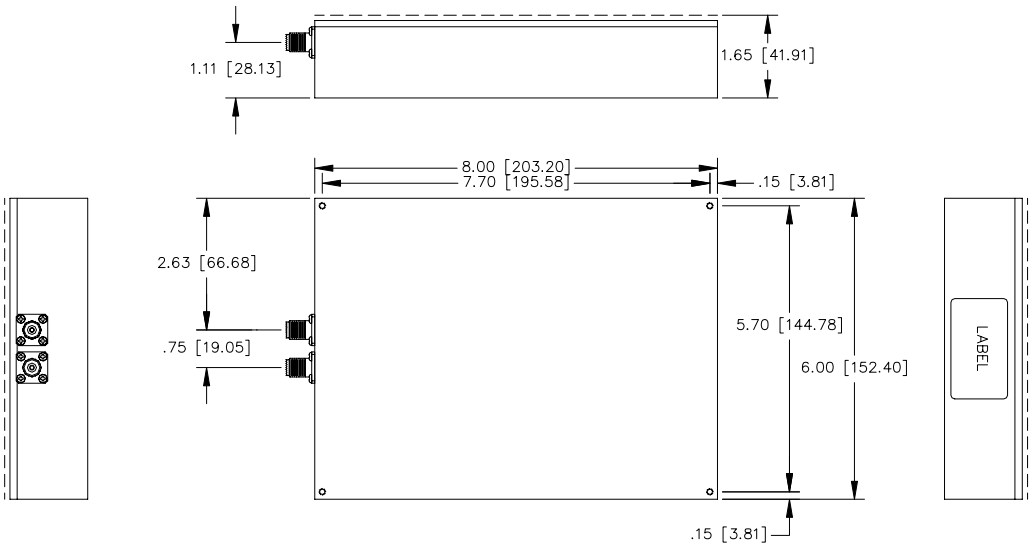

Commercial Microwave Technology, Inc.
11335 Sunrise Gold Circle, Suite B • Rancho Cordova, CA 95742
Phone: 916-631-4363 • Fax: 916-631-4364
www.cmtfilters.com