


CMN719

2.1 GHz Band Reject Filter

Revision 2, May 14, 2009

Passband:	2030 – 2109.5 MHz	
Insertion Loss:	1.60 dB max.	
Return Loss:	16 dB min.	
Rejection:	60 dB min	2110.6 – 2121.5 MHz


Connectors:	Type "N" Female
Operational Temp:	+20°C to +40°C
Finish:	Unpainted, Silver Finish

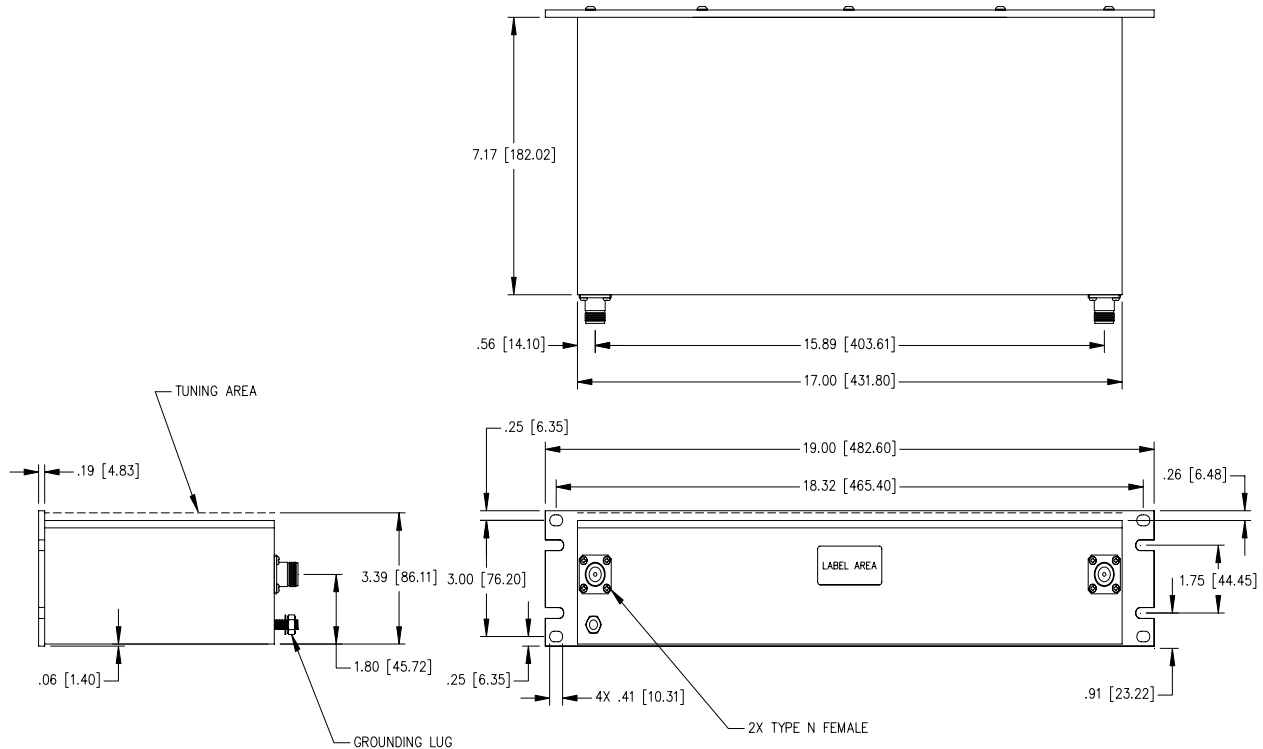



11335 Sunrise Gold Circle Suite B Rancho Cordova, CA 95742
916-631-4363 - FAX 906-631 4364

CMN719 Notch Filter Performance Data

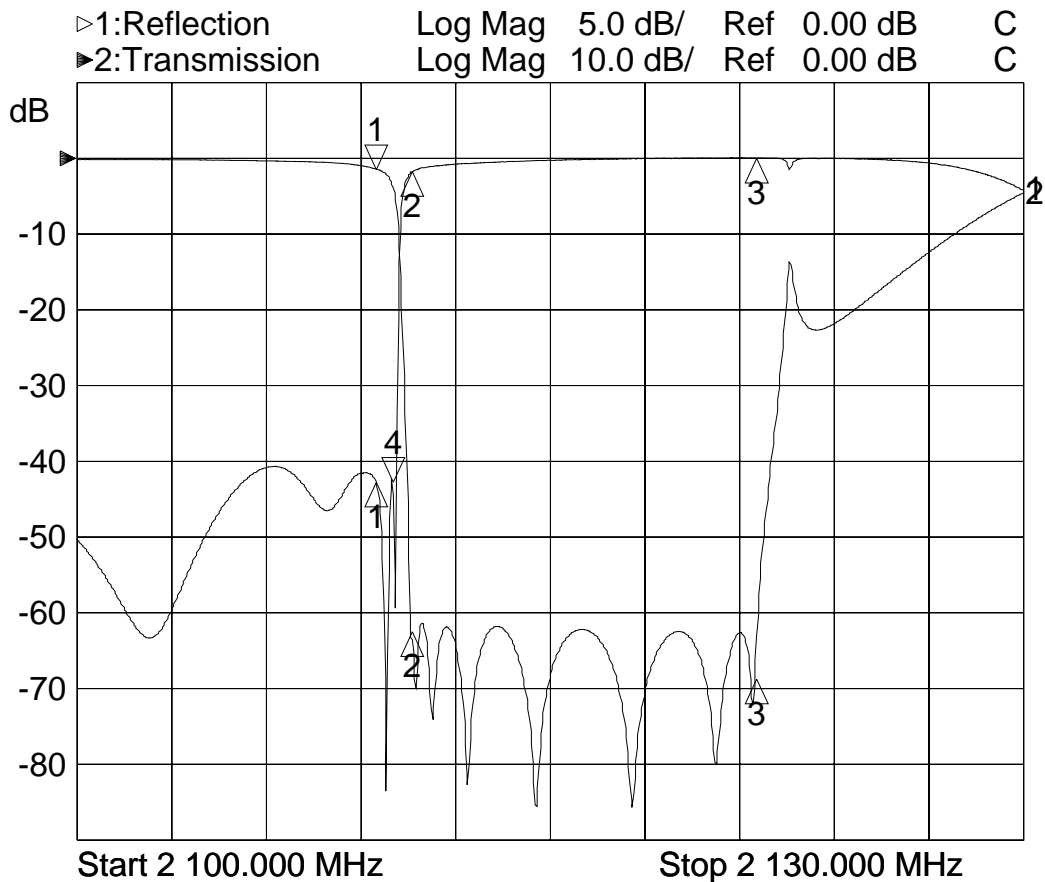


1:Mkr (MHz)	dB	2:Mkr (MHz)	dB
1: 2109.5000	-21.425	1> 2109.5000	-1.415
2: 2110.6000	-0.935	2: 2110.6000	-62.377
3: 2121.5000	0.029	3: 2121.5000	-68.630
4> 2110.0000	-21.372		



11335 Sunrise Gold Circle Suite B Rancho Cordova, CA 95742
916-631-4363 - FAX 906-631 4364

CMN719 Wide Band Performance Data

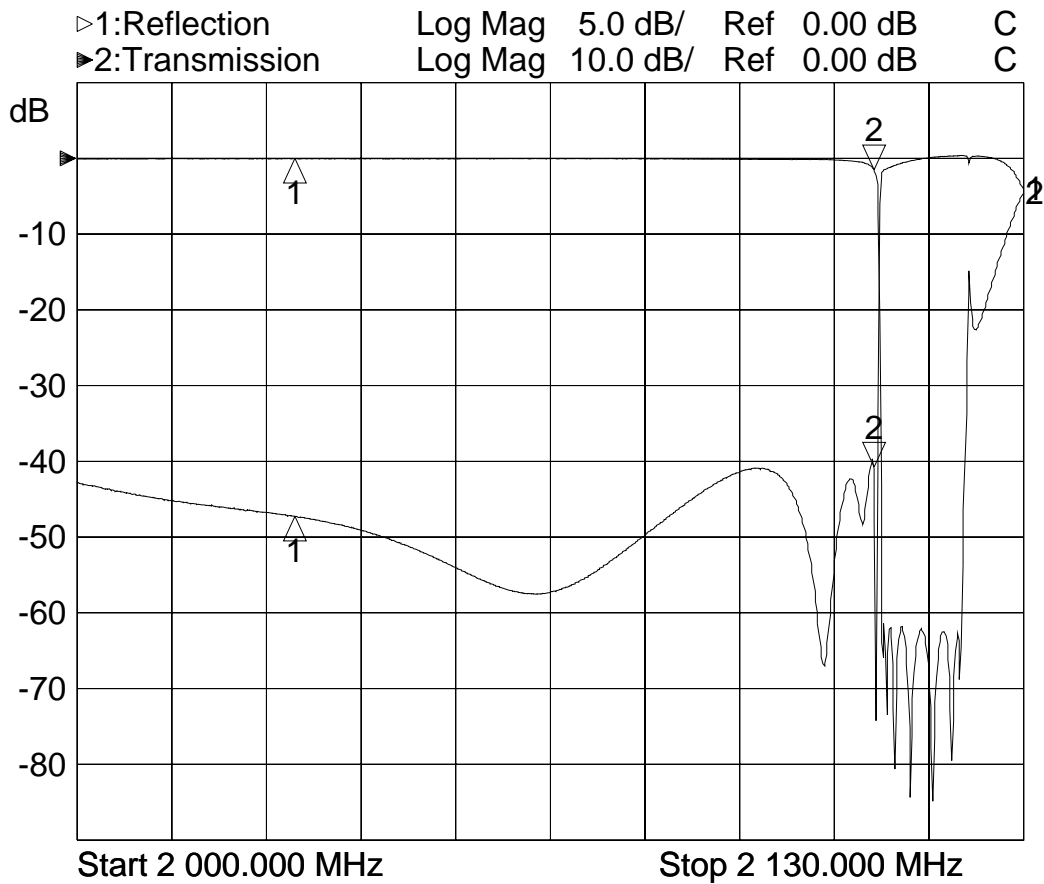

1:Mkr (MHz)	dB	2:Mkr (MHz)	dB
1: 2030.0000	-23.630	1: 2030.0000	-0.048
2> 2109.5000	-20.395	2> 2109.5000	-1.412