

Coaxial Trough Line Phase Shifters

DC to 1 GHz



Features

- Type SMA Connectors Standard
- Options from DC to 1 GHz
- High Performance, Trough Line Style Structure
- MIL Grade Materials and Processing
- -40° to + 125°C Operating Temperature Range
- 6709 Series

Technical Specifications


Model	6709
Frequency Range (GHz)	DC-1
Phase Shift, min (°/GHz)	940
Phase Shift, min (°/GHz/Shaft Turn)	9.7
Insertion Phase Nom at Min Phase Setting (°/GHz)	1040
Number of Turns, min	96
VSWR max	1.50
Insertion Loss, max (dB)	0.7
Power	
Average (Watts)	100
Peak (Watts)	1000
Time Delay, nom @ Min Phase Setting (nsec)	2.9
Weight	
Ounces	14.9
Grams	422

NOTES:

1. 1 Degree per GHz of Phase Shift equals 2.78 picoseconds of time delay.
2. Average and Peak Power are given at ambient temperature and altitude with Type SMA Connectors. Power is further limited by the power threshold level of connector style.

Trough Line Phase Shifters

Model 6709

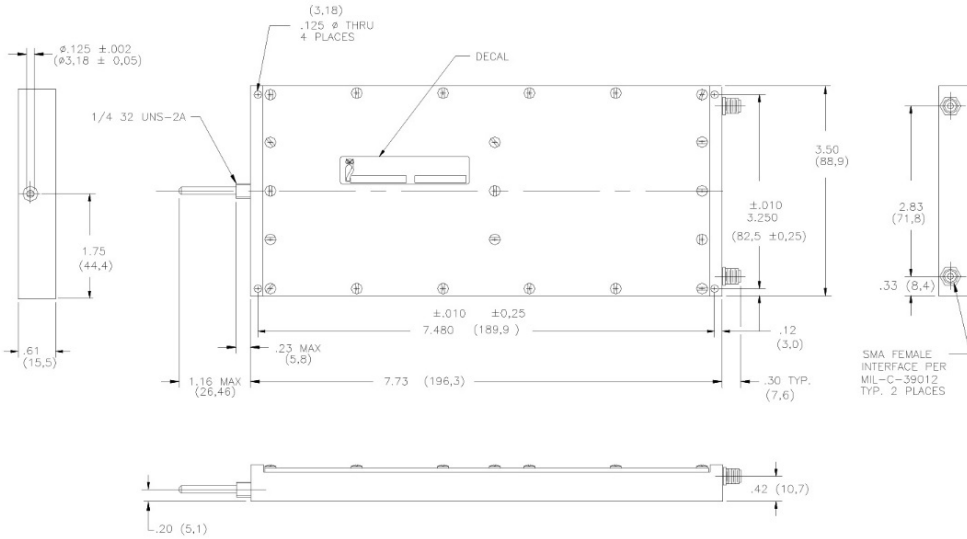

Ordering Information

Drive Shaft and Connector Options:

1. Only the following standard control options are available. The base model is available without additional options.
2. Add suffix as designated below to the ordering model number.

Model # Plus	Description
-1	Shaft Lock
-2	Turns Counter With Built In Shaft Lock
-4	Screw Driver Slot
-5	Control Knob
-14	Shaft Lock With Screw Driver Slot
-15	Shaft Lock With Control Knob

(-1) SHAFT LOCK	(-2) TURNS COUNTER W/ SHAFT LOCK	(-5) CONTROL KNOB
		<p>D= 0.5" L=0.65</p>

NOTES:

1. API Technologies "Standard Warranty and Order Terms and Conditions" apply to all orders.
2. All specifications subject to change without notice.
3. Check "Ordering and Availability Listing" for delivery and ordering information.
4. Contact our local Manufacturers Representative for pricing.