

VOLTAGE CONTROLLED OSCILLATOR *TOM9114*

60 - 120 MHz

Available as:

- TOM9114, 4 Pin TO-8 (T4)
- TON9114, 4 Pin Surface Mount (SM3)
- TOP9114, 4 Pin Flatpack (FP4)
- BXO9114, Connectorized Housing (H1)

Features

- Low Noise Bipolar Transistor
- Broad Tuning Range
- Operating Case Temp. -55 °C to + 85 °C
- Environmental Screening available

Specifications



CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	60 - 120 MHz	60 - 120 MHz
Output Power (dBm)	+12	+10.0 Min.
Power Flatness (dB)	+/-0.4	+/-0.6 Max.
Tuning Voltage Range (v)	1 to 17	0 to 20
Tuning Voltage Sensitivity (MHz/V)	4	1.5 Min.
Harmonics (dBc)	-11	-10 Max.
Spurious (dBc)	<-80	-80 Max.
3dB Modulation BW, Zg = 50 Ohms	---	1MHz Min.
Pushing (MHz/V)	0.25	1.0 Max.
Pulling (MHz); 12 dB RL	1	3.0 Max.
Frequency Drift (MHz/°C)	---	0.03 Max.
Power Vdc	+15	+15
mA	14	17

Maximum Ratings


- Ambient Operating Temperature -55°C to + 100 °C
- Storage Temperature -62°C to + 125 °C
- Case Temperature + 125 °C
- DC Voltage + 20 Volts
- Maximum DC Tuning Voltage + 20 Volts
- Minimum DC Tuning Voltage 0 Volt

Note: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

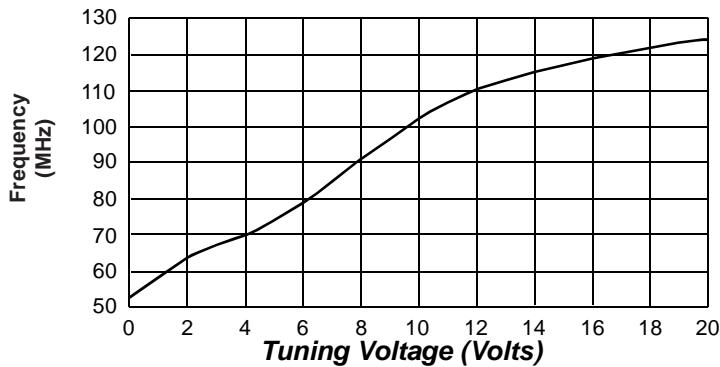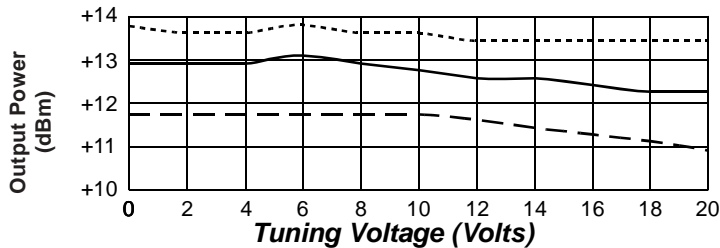

Legend ----- + 25 °C ----- +85 °C - - - - -55 °C

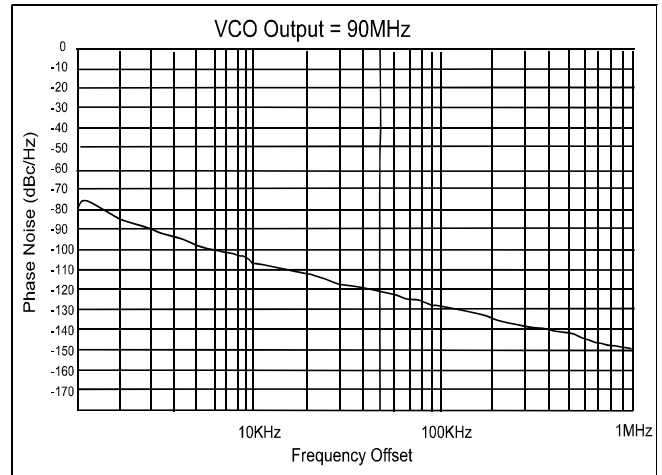

Notes:

1. Phase Noise is measured using the Aeroflex PN9000.
2. Worst case phase noise @ 100KHz offset across frequency range and temperature extremes is -120 dBc/Hz.



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 12/17/04

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001