

# RF AMPLIFIER

# Medium Power Amplifier

## MODEL *BXMP1033*

Available as: WNMP1033, 10 Pin .625" Sq. Gullwing Surface-Mount (SG4)  
 BXMP1033, SMA Connectorized Housing

### Features

- High Output Power: +30.5 dBm Typical
- High Third Order Intercept: +47 dBm Typical
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

### Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point ..... +60 dBm (Typ.)  
 Second Order Two Tone Intercept Point ..... +54 dBm (Typ.)  
 Third Order Two Tone Intercept Point ..... +47 dBm (Typ.)

### Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	1 - 50 MHz	1 - 50 MHz
Gain (dB)	35	34 Min.
Power @ 1 dB Comp. (dBm)	+30.5	+30 Min.
Reverse Isolation (dB)	-45	-40 Max.
VSWR In	1.8:1	2.0:1 Max.
Out	1.8:1	2.0:1 Max.
Noise figure (dB)	5.5	6.0 Max.
Power Vdc	+15	+15
mA	435	500 Max.

### Absolute Maximum (No Damage) Ratings

Ambient Operating Temperature ..... -55°C to +100 °C  
 Storage Temperature ..... -62°C to +125 °C  
 Case Temperature ..... +125 °C  
 DC Voltage ..... +18 Volts  
 Continuous RF Input Power ..... +20 dBm  
 Short Term RF Input Power ..... 50 Milliwatts (1 Minute Max.)  
 Maximum Peak Power ..... 0.5 Watt (3 µsec Max.)

Note: Care should always be taken to effectively ground and heatsink the case of each unit.

### Typical Performance Data

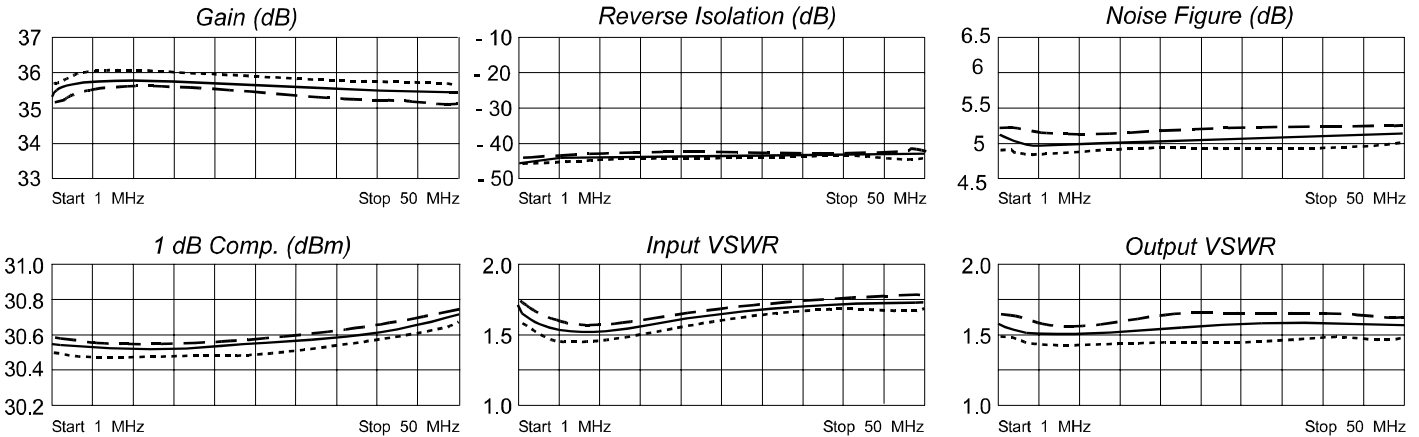

Legend ——— +25 °C    - - - - +85 °C    ······ -55 °C



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

Rev. 6/9/10

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001