

RF AMPLIFIER

MODEL *TM3066*

Available as: TM3066, 4 Pin TO-8 (T4)
 TN3066, 4 Pin Surface Mount (SM3)
 FP3066, 4 Pin Flatpack (FP4)
 BX3066, Connectorized Housing (H1)

Features

- High Gain: 31 dB Typical
- Low Noise Figure: 2.0 dB Typical
- No External Circuitry Needed.
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 300 MHz	10 - 300 MHz
Gain (dB)	31	30 Min.
Power @ 1 dB Comp. (dBm)	+18	+17 Min.
Reverse Isolation (dB)	- 35	-34 Max.
VSWR In	1.5:1	1.7:1 Max.
Out	1.5:1	1.7:1 Max.
Noise Figure (dB) *	2.0	2.5 Max.
Power Vdc	+15	+15 Min.
mA	85	90 Max.

Note: Care should always be taken to effectively ground the case of each unit.

* Noise Figure is 3.0 dB Max at 10 MHz

Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +42 dBm (Typ.)
 Second Order Two Tone Intercept Point +39 dBm (Typ.)
 Third Order Two Tone Intercept Point +32 dBm (Typ.)


Maximum (No Damage) Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Revision: 2-2-2017

ECN: Adding 10 MHz Noise Figure asterick

Typical Performance Data

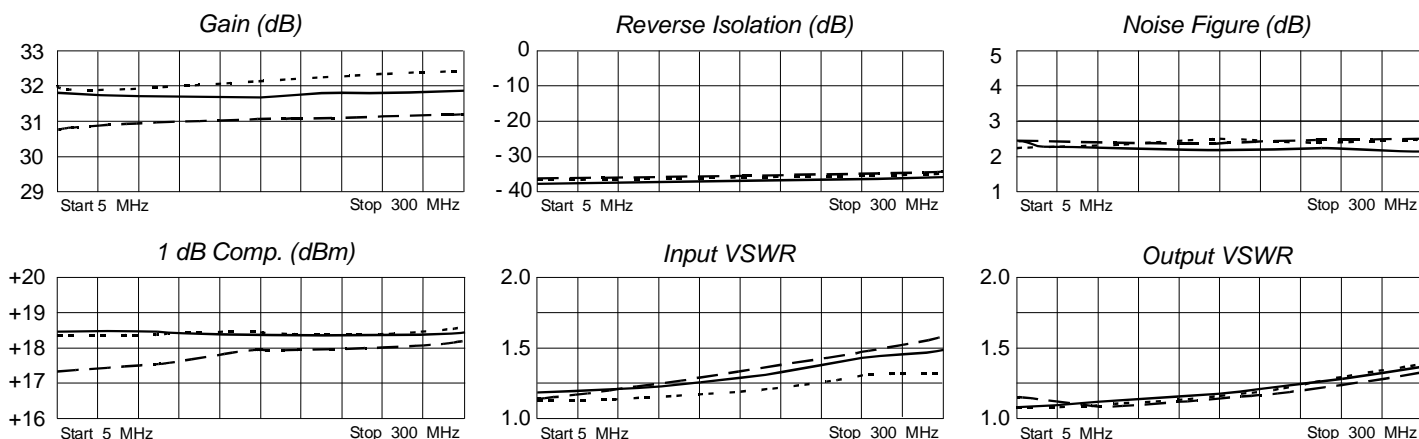

Legend ——— + 25 °C - - - - + 85 °C ······ -55 °C



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.spectrummicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001