

1100 to 2200 MHz Frequency Synthesizer

Low Phase Noise in a Lower Cost Package



Features

- Low Phase Noise: -104 dBc/Hz (100 kHz offset)
- **External Reference Oscillator (Internal Ref. Option at No Extra Charge)**
- No User Programming Required
- Integrated Microcontroller Look-up Table
- Customized Parallel or Serial Programming Available
- Additional Complementary Output Line is Available (Option)

API Technologies' Model LCFS1072 frequency synthesizer combines a monolithic integer-n microwave synthesizer, a reference oscillator and a microcontroller to provide an economical frequency source solution. Complex serial register programming is not required. A built-in lookup table in the microcontroller allows for simplified frequency programming with a dual 8-bit binary frequency selection word. Either parallel or serial programming can be accommodated.

Technical Specifications

Parameter	Typical	Min/Max
Frequency Range	1100 to 2200 MHz	1100 to 2200 MHz
Output Power	+13 dBm	-
External Reference Input Power Requirement (CW)	0 to +13 dBm	0 to +13 dBm
Step Size	10 MHz	-
SSB Phase Noise **	-96 dBc/Hz @ 1 kHz -101 dBc/Hz @ 10 kHz -104 dBc/Hz @ 100 kHz -133 dBc/Hz @ 1 MHz -150 dBc/Hz @ 10 MHz	-
Digital Lock Indicator	3.3 volt logic	-
Locking Speed	80 μ sec	-
Spurious	-40 dBc	-
Harmonics	-20 dBc	-
Output VSWR	1.75:1	2.0:1
Optional Binary Divided Output	2,4,8,16,32,64,128	
DC Supply Voltage	+3.3 volts	(+/- 2%) volts
DC Supply Current *	150 mA *	---

** SSB phase noise dependent on the input reference performance.

Maximum (No Damage) Ratings

Storage Temperature	-55°C to +125°C
Operating Temperature	-40°C to +85°C
DC Voltage	+5 volts

Notes: Typical values are measured at 25°C, but not guaranteed.



Up to 2 Optional Outputs

- One Output line: 150 mA *
- Two Output Lines: 225 mA*

Mechanical & Electrical

Parameter	Specification
Specification Temperatures (Min/Max)	-20°C to +70°C
Housing Size	0.800" L x 0.800" W x 0.130" H
Housing Drawing	LC800
Package Type	Surface Mount

Typical Performance

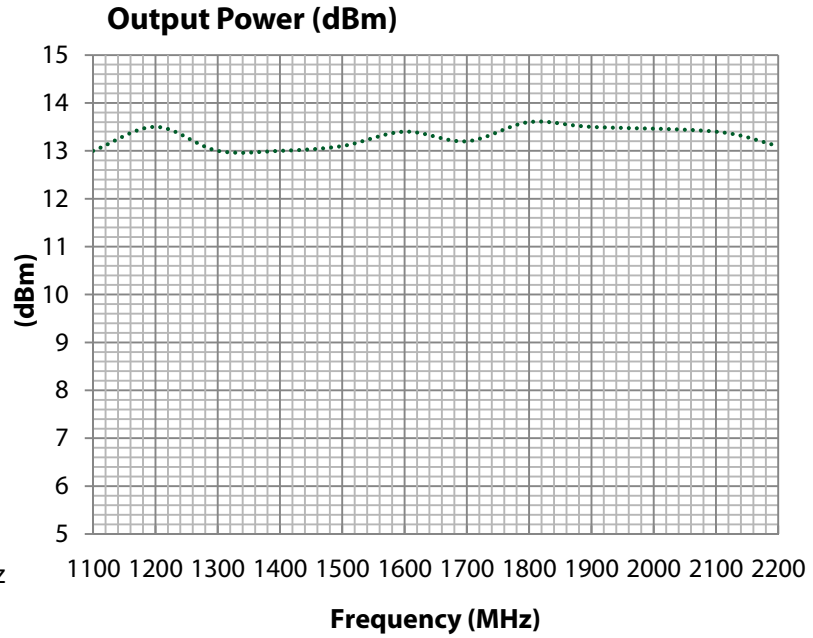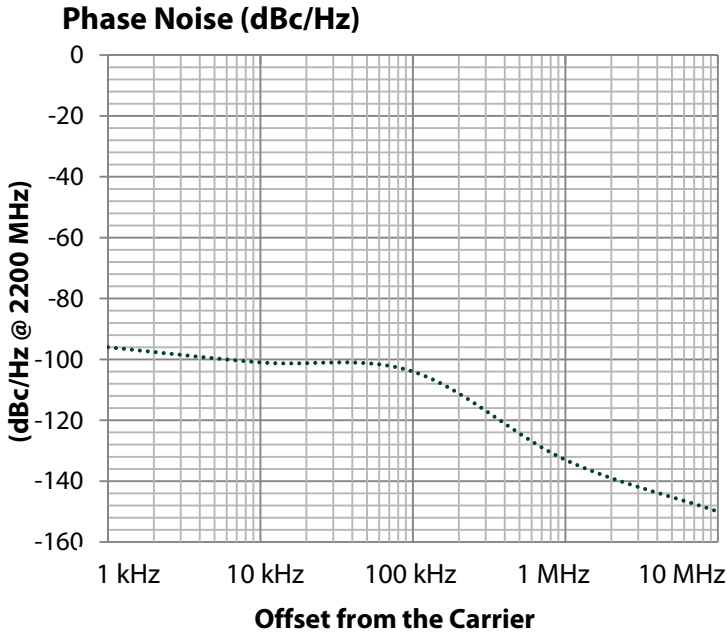

Notes

1. Specifications labeled "min." or "max." are guaranteed in a 50 Ohm system over the specified temperature range.
2. Output frequency and step size must be specified.
3. Other input voltages are available.

Outline Drawing (LC800 Package)

